

Acoustik PUHLS



ACOUSTICAL WALL PANEL

TECHNICAL DATA

Wood Specie:

White oak

Dimension:

12.8" x 48" / 4.3 sq.ft.


Thickness:

23.4 mm

Finish:

10% U.V. varnish
(low V.O.C. water based clear sealer)
Antimicrobial protection

Fire rating: Class A

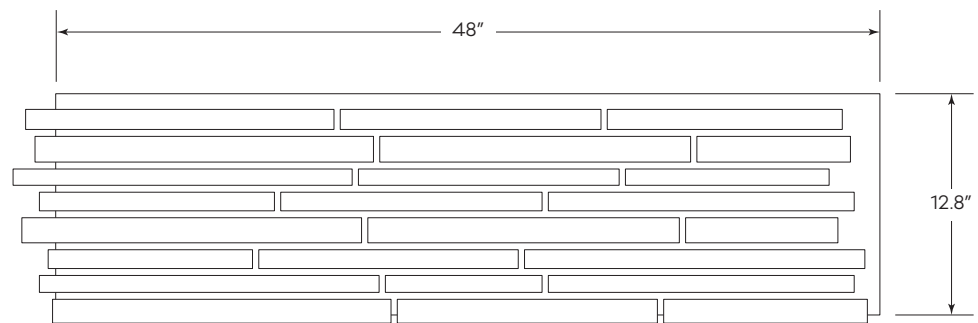


LAYERS

Top:

Wood veneer
with a fire treated MDF core

Bottom:

Stone wool with a MDF frame

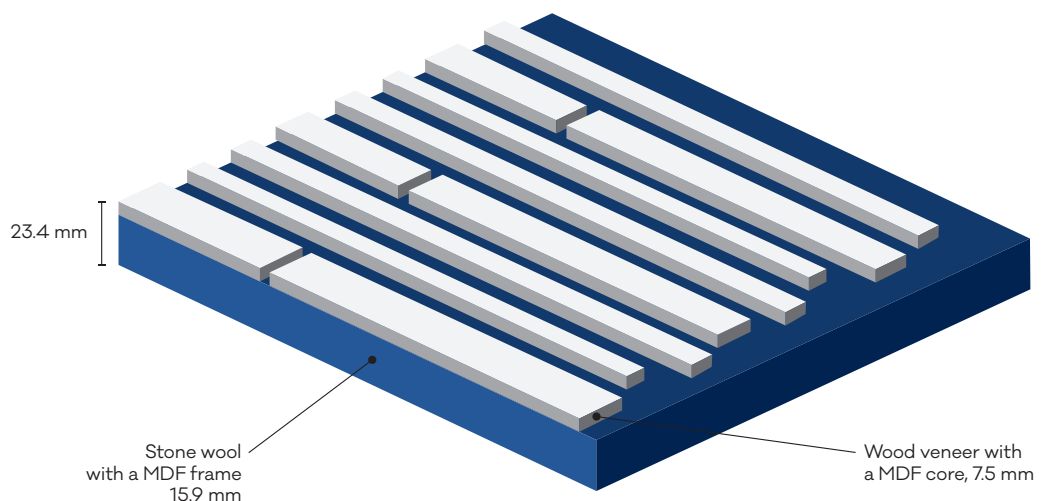


FINIUM®



ACOUSTICAL PERFORMANCE

Frequency (Hz):	Adsorption coefficient:
250	0.232
500	0.579
1000	0.784
2000	0.817
NRC:	
0.60	
SAA:	
0.61	

Absorption Spectrum of Tested Panels

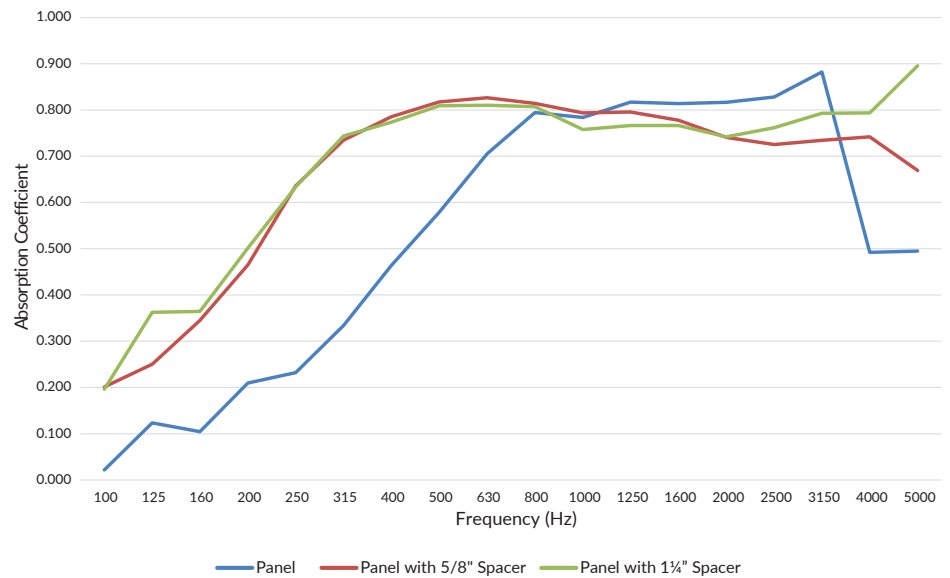


ENVIRONMENT

Stone wool:
Up to 29% recycled content
Wood:
Responsibly sourced in North America

PART OF OUR ZERO WASTE POLICY

Varnish:
Reused and/or recycled
Wood:
We maximize our production and product development to minimize waste. Any leftover is transformed into highly efficient clean-burning wood pellets

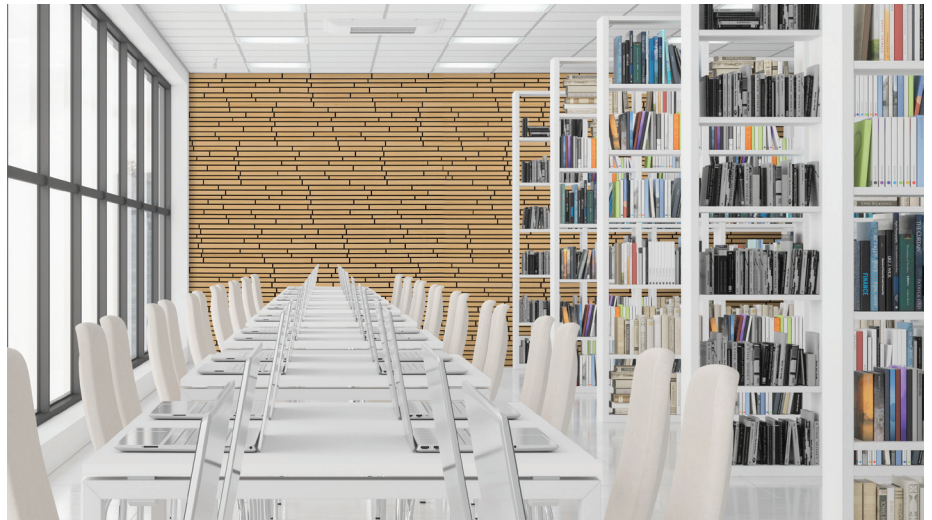

Acoustik PUHLs

finium.ca



MADE IN CANADA

DUE TO THE NATURE OF THE PRODUCT AS A UNIQUE ORGANIC MATERIAL, THERE MAY BE IMPERFECTIONS AND COLOR VARIATIONS, AND THE FINAL PRODUCT MAY DIFFER FROM THE SAMPLES.