

PRECAUTIONS

Always wear work gloves and safety glasses when cutting product.



View our installation video before getting started:
www.finium.ca

TOOLS

- 100% polyurethane construction glue (3 tubes per 100 ft² or 10 m²)
- Caulking gun
- Electric mitre saw
- Table saw
- Level
- Measuring tape
- Cutter
- Pneumatic finish nailer (#23 gauge finish nail)
- Stepladder

WALL PANEL NEEDS TO BE GLUED AND NAILED FOR A SUCCESSFUL INSTALLATION AND TO PREVENT FUTURE WARPING. FAILURE TO COMPLY WITH INSTALLATION INSTRUCTIONS SHALL VOID APPLICATION OF THE WARRANTY.


Do not install over material other than drywall or plywood.

MAKE SURE YOUR KNIVES AND SAWBLADES ARE IN TOP CONDITION.

FIRST, check that wall is level from floor to ceiling and edge-to-edge. If not, adjust accordingly.


STEP 1: If you are using mouldings, mark required space around the perimeter of installation area.

STEP 2: Cut a minimum of 6" (15 cm) from male side of panel to form your starting panel.

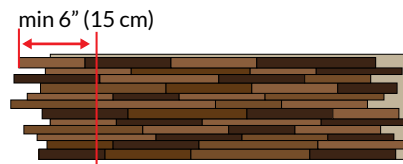

STEP 3:


A Apply a line of 100% polyurethane glue (1/2" (1.3 cm) from the edge) and an X inside the rectangle.



B Apply glue on backing at edge.



STEP 4: Position first panel at lower left of wall. If using mouldings, position in area designated in Step 1.

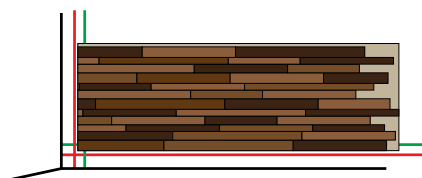


STEP 5: Nail panel in place with #23 gauge finish nails on backing around panel and at an angle in backing on two bottom rows between wood slats. NEVER NAIL DIRECTLY ON FACE OF NARROW WOOD SLATS.



STEP 6: Installation of subsequent panels

- Repeat gluing procedure.
- Insert panel B into panel A.
- Repeat nailing procedure.

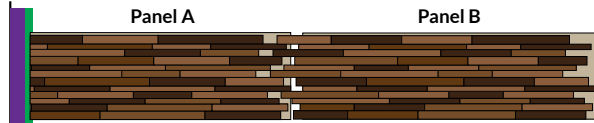

STEP 7: End a row / Cut any excess of wall panel flush with edge of wall.

STEP 8: Start a new row / Use remaining piece from previous row or repeat Step 2. Repeat Steps 3, 4 and 5.

STEP 9: Last row / Cut panels of last row lengthwise to fit available space. If required, allow enough space for the moulding.

STEP 10: Insert moulding in previously designated area if required.

NOTE: If wood pieces separate from a wall panel, reposition using 100% polyurethane glue.

Finium guarantees the conformity of its products when they are installed according to installation instructions and maintained in an environment where ambient humidity ranges between 35% and 55%: before, during and after installation.

PRIOR TO INSTALLATION, PLACE CARTONS IN ORIGINAL PACKAGING FLAT ON THE FLOOR OF PLANNED ROOM.

