

# Acoustik OKTAV



## ACOUSTICAL WALL PANEL

### TECHNICAL DATA


**Wood Specie:**  
White oak

**Dimension:**  
12.8" x 48" / 4.3 sq.ft.

**Thickness:**  
23.4 mm

**Finish:**  
10% U.V. varnish  
(low V.O.C. water based clear sealer)  
Antimicrobial protection


Fire rating: Class A


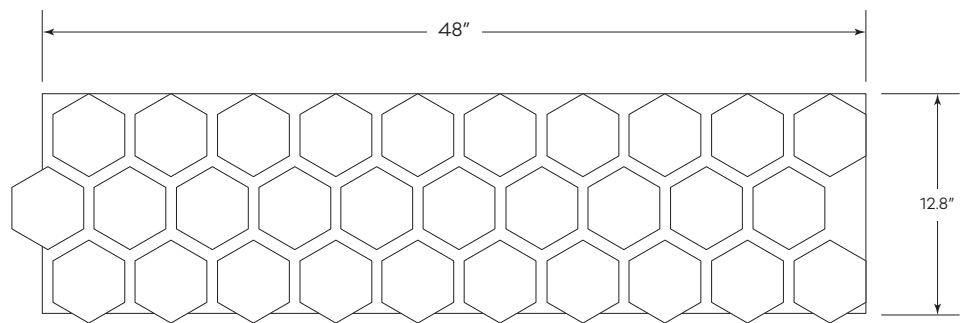


### LAYERS

**Top:**  
Wood veneer  
with a fire treated MDF core

**Bottom:**  
Stone wool with a MDF frame

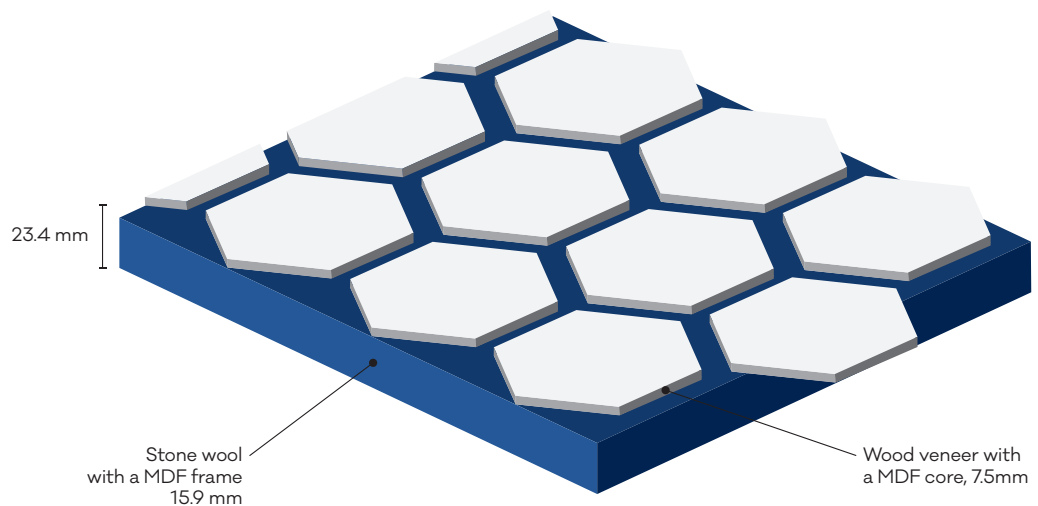

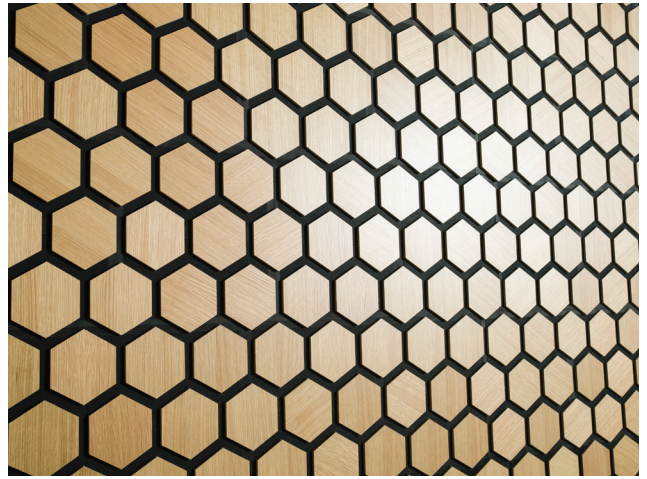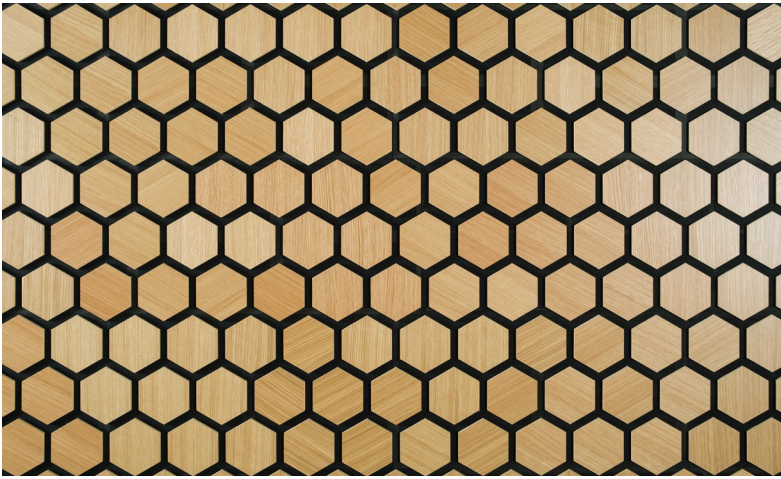


## ACOUSTICAL PERFORMANCE

Frequency (Hz):	Adsorption coefficient:
250	0.232
500	0.579
1000	0.784
2000	0.817

**NRC:**  
0.60

**SAA:**  
0.61

Absorption Spectrum of Tested Panels

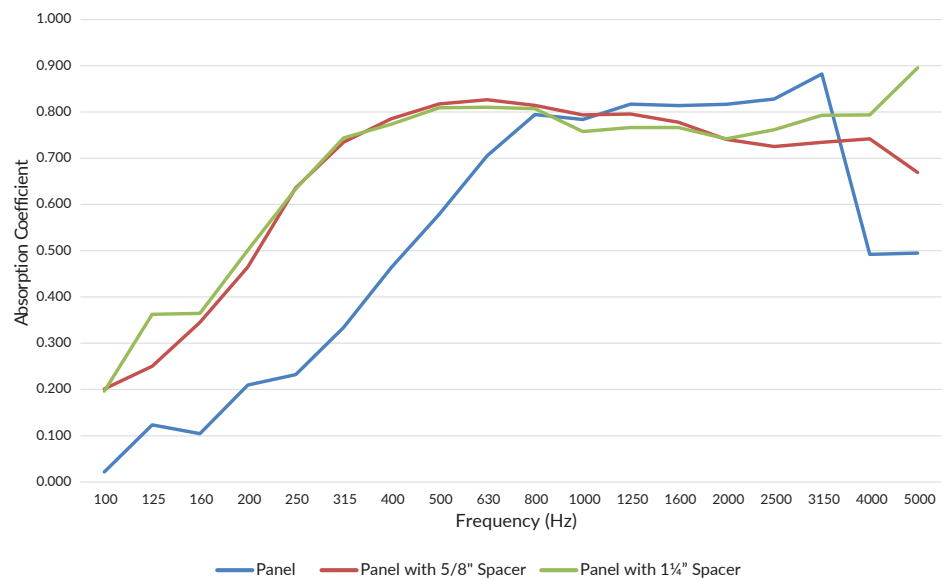

## ENVIRONMENT

### Stone wool:

Up to 29% recycled content

### Wood:

Responsibly sourced in North America

### PART OF OUR ZERO WASTE POLICY

#### Varnish:

Reused and/or recycled

#### Wood:

We maximize our production and product development to minimize waste. Any leftover is transformed into highly efficient clean-burning wood pellets



AcoustiK OKTAV

finium.ca



MADE IN CANADA

DUE TO THE NATURE OF THE PRODUCT AS A UNIQUE ORGANIC MATERIAL, THERE MAY BE IMPERFECTIONS AND COLOR VARIATIONS, AND THE FINAL PRODUCT MAY DIFFER FROM THE SAMPLES.