

# Acoustik PUHLS



## ACOUSTICAL WALL PANEL

### TECHNICAL DATA


**Wood Specie:**  
White oak

**Dimension:**  
12.8" x 48" / 4.3 sq.ft.

**Thickness:**  
21.9 mm

**Finish:**  
10% U.V. varnish  
(low V.O.C. water based clear sealer)  
Antimicrobial protection


Fire rating: Class A

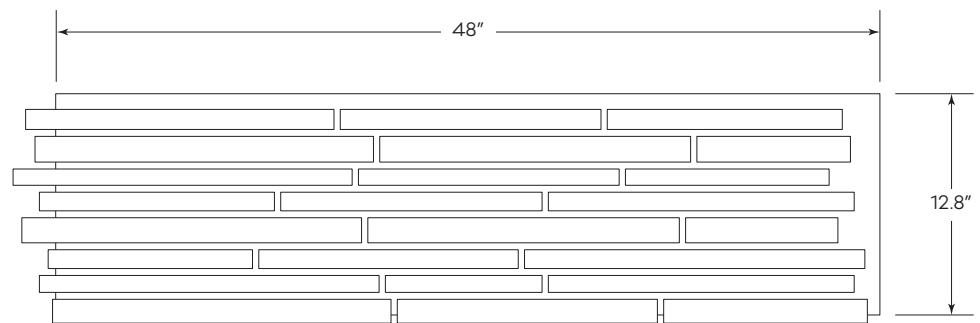

### LAYERS

**Top:**  
Wood veneer  
with a fire treated MDF core

**Bottom:**  
Stone wool with a MDF frame

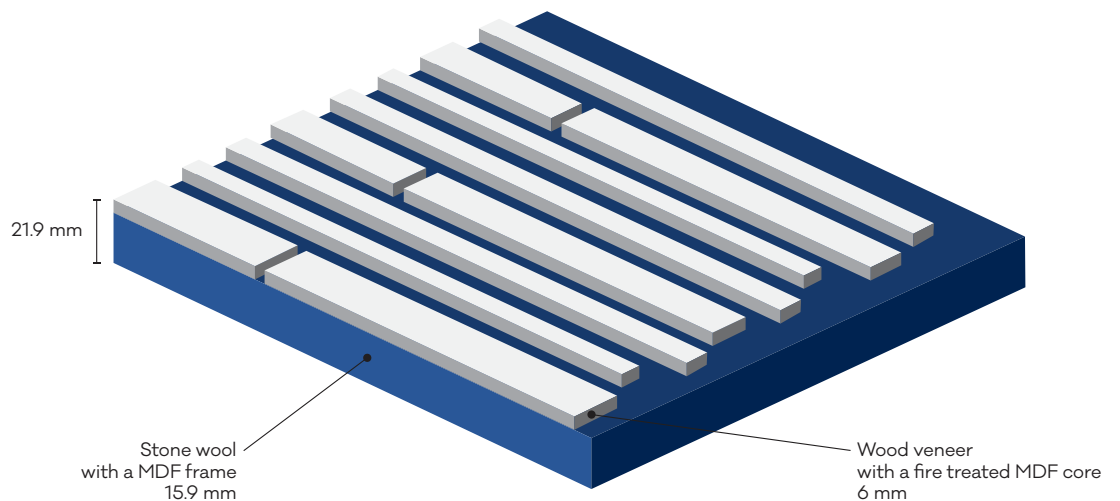



## ACOUSTICAL PERFORMANCE

Frequency (Hz):	Adsorption coefficient:
250	0.232
500	0.579
1000	0.784
2000	0.817

**NRC:**  
0.60

**SAA:**  
0.61

### Packaging:

2 wall panels per box / 14 lbs / 8.6 sq.ft.

### Trim:

1" x 0.79" x 90"


### Installation:

Interlocking wall panel, glue and nails

### Warranty:

2 years limited warranty

Absorption Spectrum of Tested Panels

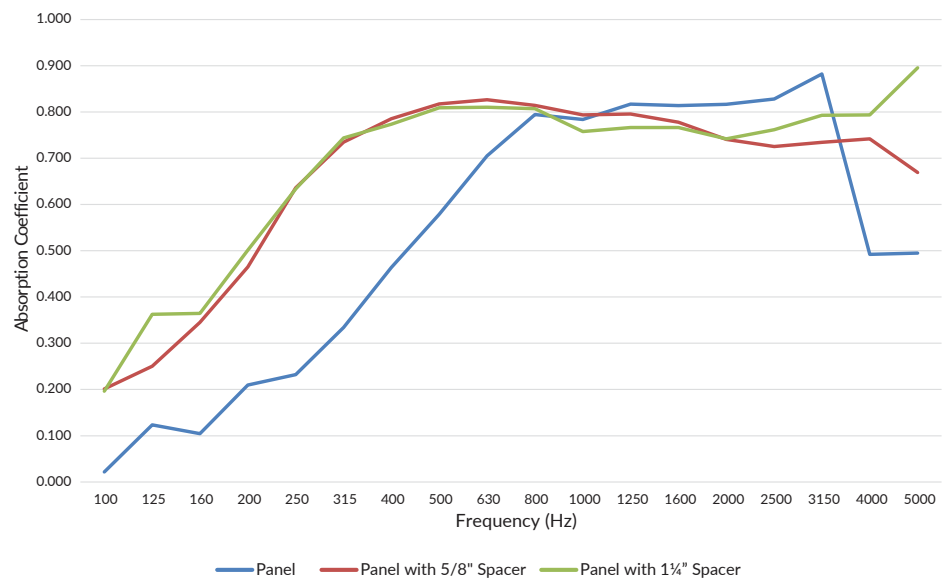

AcoustiK PUHLS

finium.ca



MADE IN CANADA

DUE TO THE NATURE OF THE PRODUCT AS A UNIQUE ORGANIC MATERIAL, THERE MAY BE IMPERFECTIONS AND COLOR VARIATIONS, AND THE FINAL PRODUCT MAY DIFFER FROM THE SAMPLES.